




# Graco Secure Coverage LED Nursery Unit Replacement

Replace the LED on your Graco Secure Coverage Digital Baby Monitor for nursery unit.

Written By: Bryson Wolff

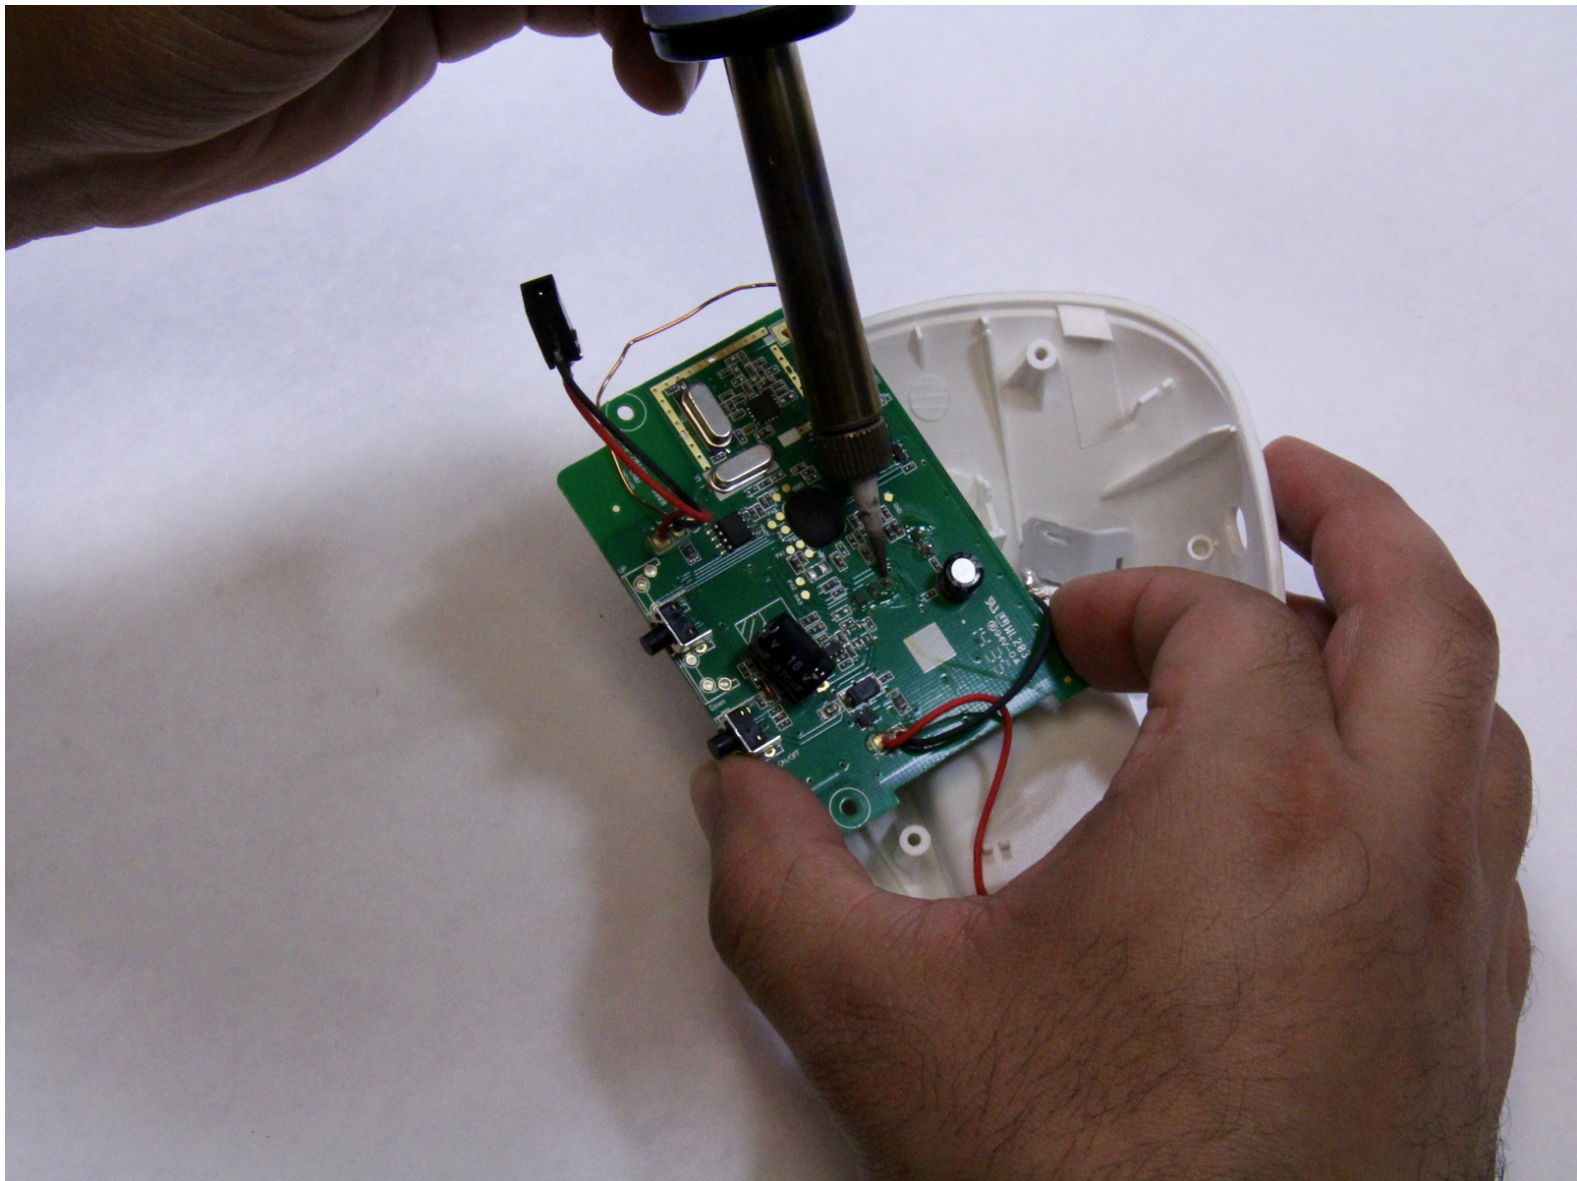

## INTRODUCTION

Use this guide to replace the LED on your Graco Secure Coverage Digital Baby Monitor for nursery unit.


The LED replacement includes the LED and battery replacement.



### TOOLS:



- [Phillips #1 Screwdriver](#) (1)
  - [iFixit Opening Tools](#) (1)
  - [Soldering Station](#) (1)
-

## Step 1 — Nursery Unit Battery

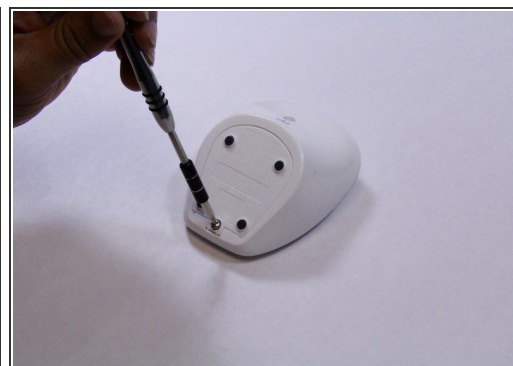

- Remove the 9mm screw from the battery cover of the nursery unit using a Phillips #1 tip screwdriver.


## Step 2

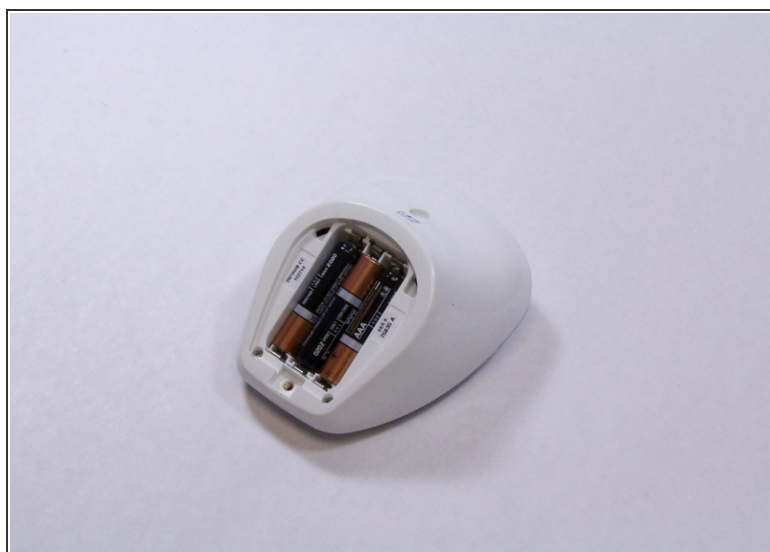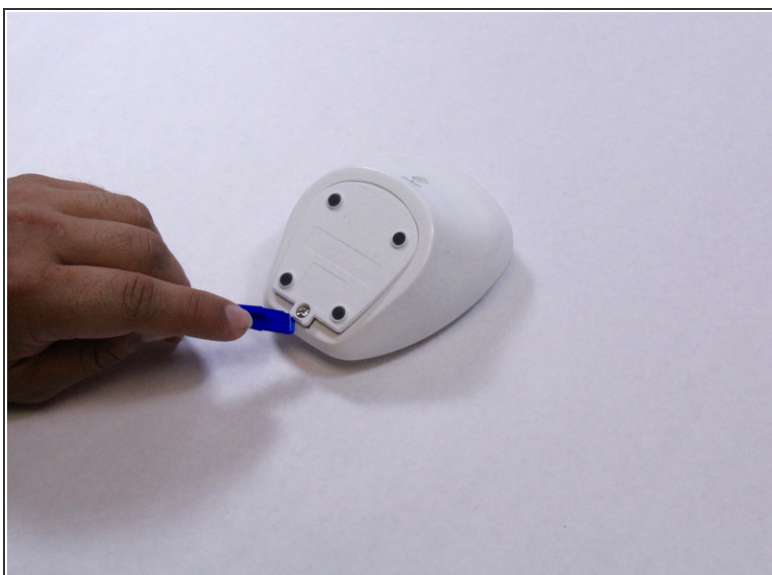

- Using the plastic opening tool, pry and remove the battery cover carefully.
- Remove the batteries using plastic opening tool.
- Replace the batteries.




## Step 3 — LED Nursery Unit

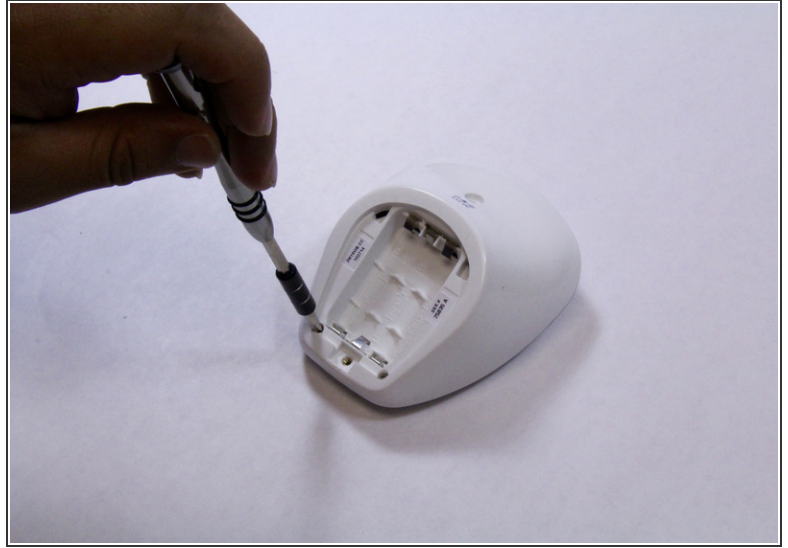



- Remove the two 9mm Phillips #1 screws from the rear case of the device.
- Place the screws in a secure place.

## Step 4

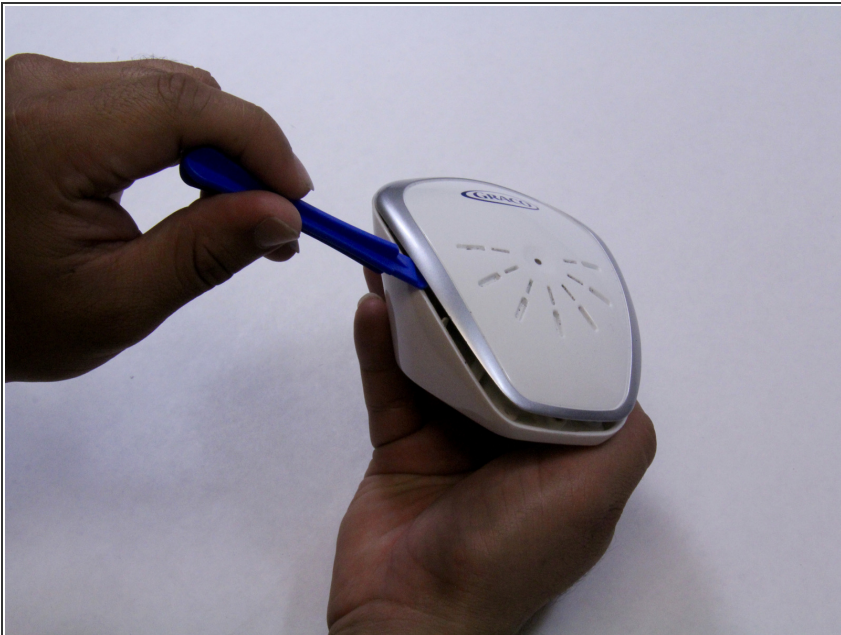




- Hold the bottom of the device with one hand and pull down to separate the front and rear cases.
  - While holding the device with one hand, use plastic opening tool to pry the edges of the front case away from the back case.
- ⚠ Apply constant force carefully to avoid breaking any other plastic parts from the device.


## Step 5

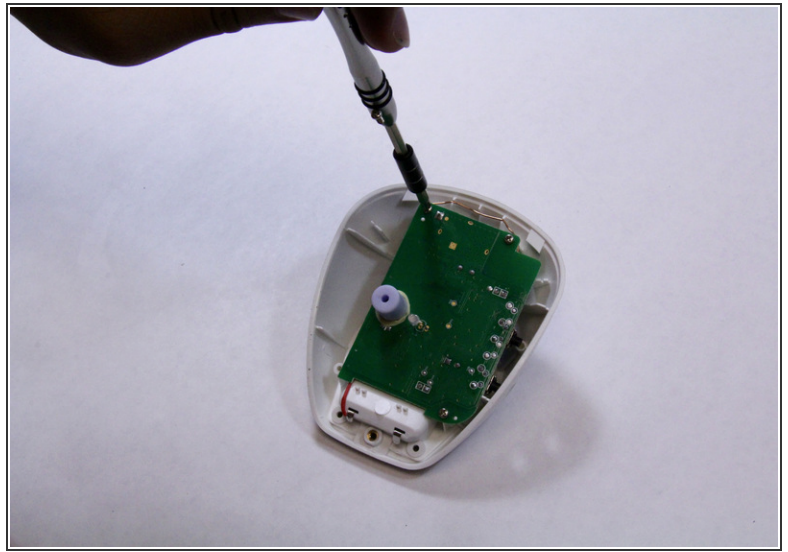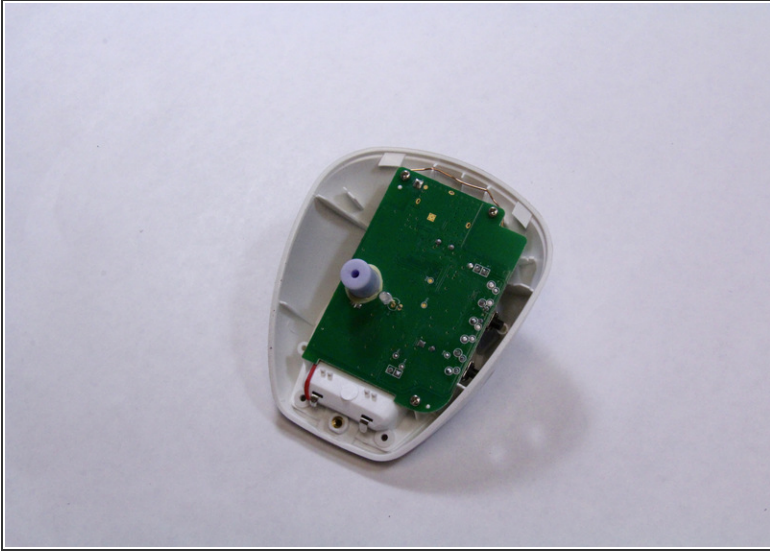

- Remove all three 7mm Phillips #1 screws from the motherboard.
- Place the screws in secure place.

## Step 6

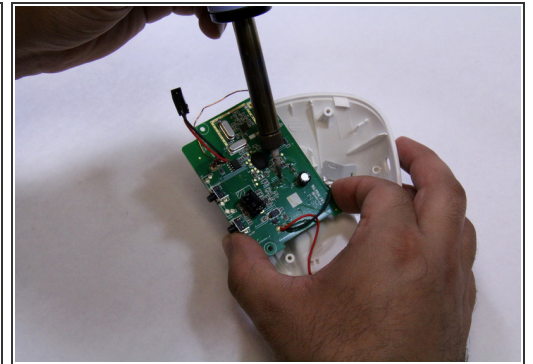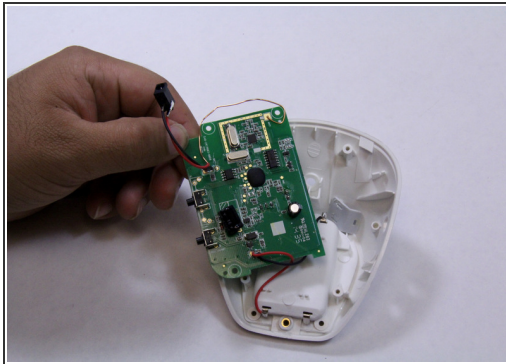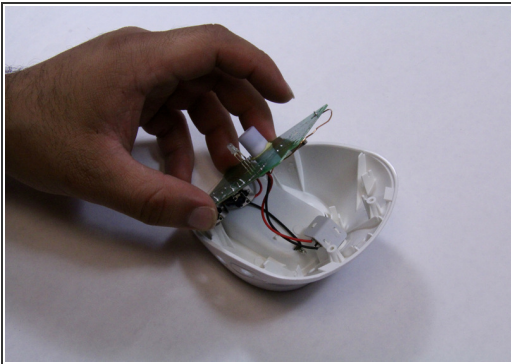

- Flip over the motherboard to look at the LED pins that are connected to it.
  - Solder off the LED pin from the motherboard.
-  There are many pins are connect to the motherboard, so make sure that you solder off the LED pin.
- Replace the LED.

To reassemble your device, follow these instructions in reverse order.

